


sepioo D2.7 B

Technical Details


Dimensions (mm)	92.6 x 50.2 x 13.2 (without LED)
Display technology	Full graphic E-ink display
Active display area (mm)	57.3 x 38.2
Resolution (pixels)	264 x 176
Pixel density	117 dpi
Pixel colors	Black/white
Protection glass	Yes
Usable pages	12
Casing color	Anthracite
Operating temperature	0°C to +45°
Storage temperature (best for batteries)	-20°C to +50°C +15°C to +30°C)
Battery	2x CR2450
Battery lifetime	10 years (7.000-10.000 updates)

Encryption	128-bit AES with secure key exchange
Compliance	CE, ROHS, FCC/IC
Packaging unit	80 labels/box
NFC	Yes, operating frequency: 13.56 MHz
Operating frequency	2.400 – 2.480 GHz, maximum EIRP ≤ 10 mW
LED	1x white / 1x RGB (red/green/ blue/ yellow/ cyan/magenta)
Wireless firmware update	Yes
Buttons	4 Buttons
Protection class	IP65

Technical Drawing

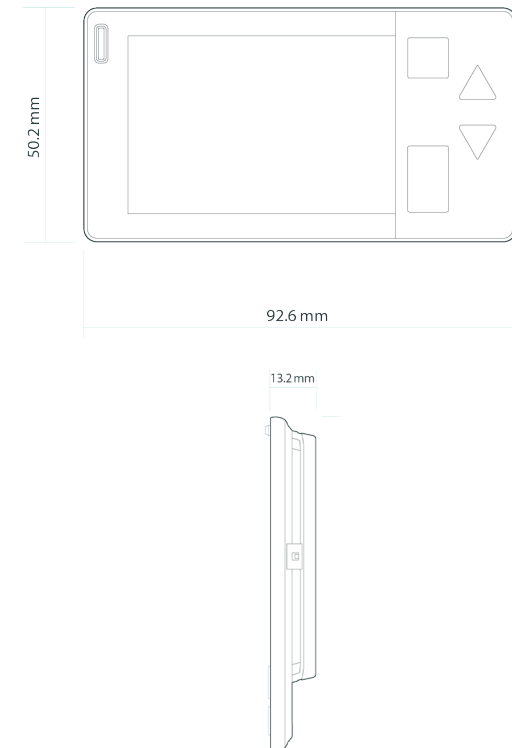

sepioo D2.7 B

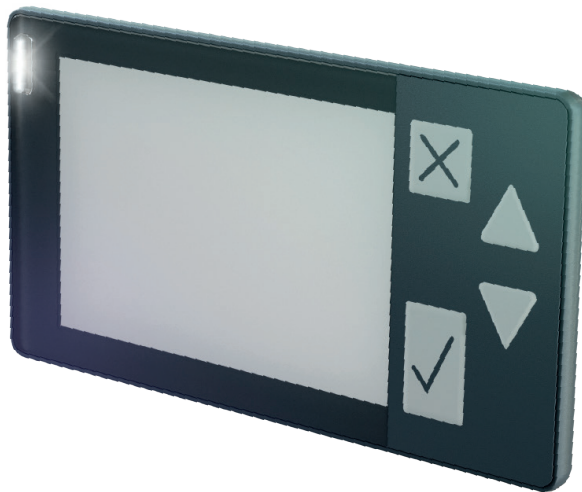

e-shelf-labels | S&K Solutions GmbH

Sailerwöhr 16 | 94032 Passau
+49 (0) 851 / 2009 30 30

info@e-shelf-labels.com
www.e-shelf-labels.com

a brand of  solutions

The logo for S&K solutions, featuring the letters 'S' and 'K' in white inside a blue circle, with the word 'solutions' in a smaller font below it.